

Remote control - for Ankarlift





Transmitter:

Power source	2 1,5V AAA batteries
Frequence	433,92 MHz
Protection class	IP66
Operative temperature	0/+70°C
Measures (mm):	52x98x26
Weight (g):	85


Reciever:

Power source	10 - 30V DC
Frequence	433,92 MHz
Protection class	IP65
Operative temperature	0/+70°C
Measures (mm):	150x57x32
Weight(g):	100
Max load/30V DC	3A

Diagram:

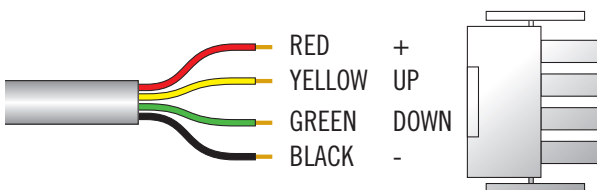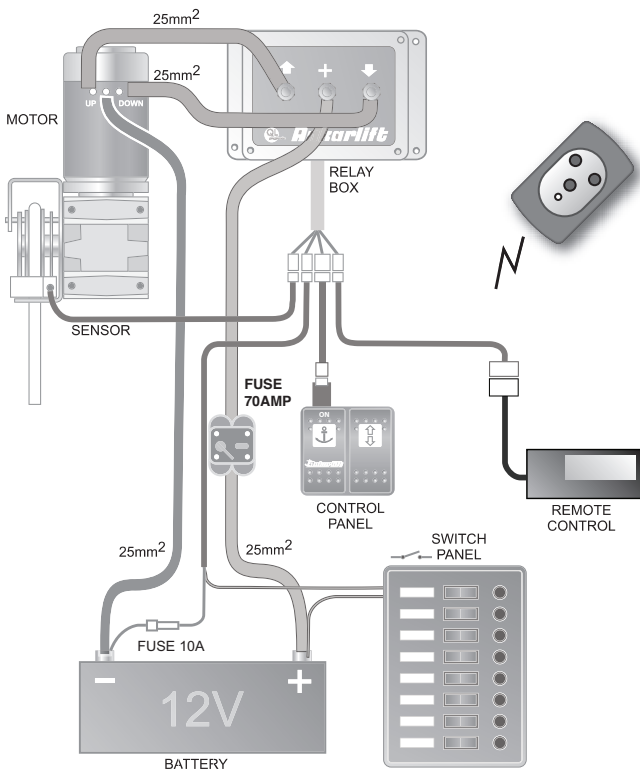

Transmitter:

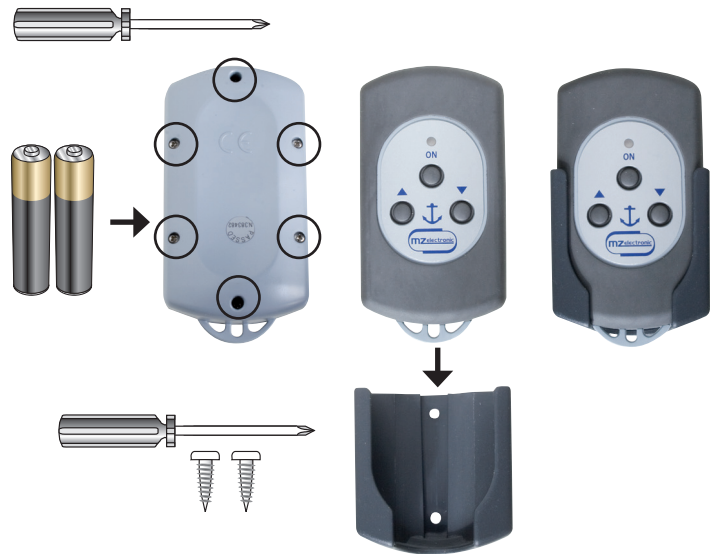

Uses 2 AAA batteries.
Holder is mounted in the appropriate position in the boat.

Funktion:

